


FISHMAN FLUENCE™

Herman Li Humbucker Set

HSH Wiring with SSA Single Width Pickup - Rev4 Logic Board 03/07/2025

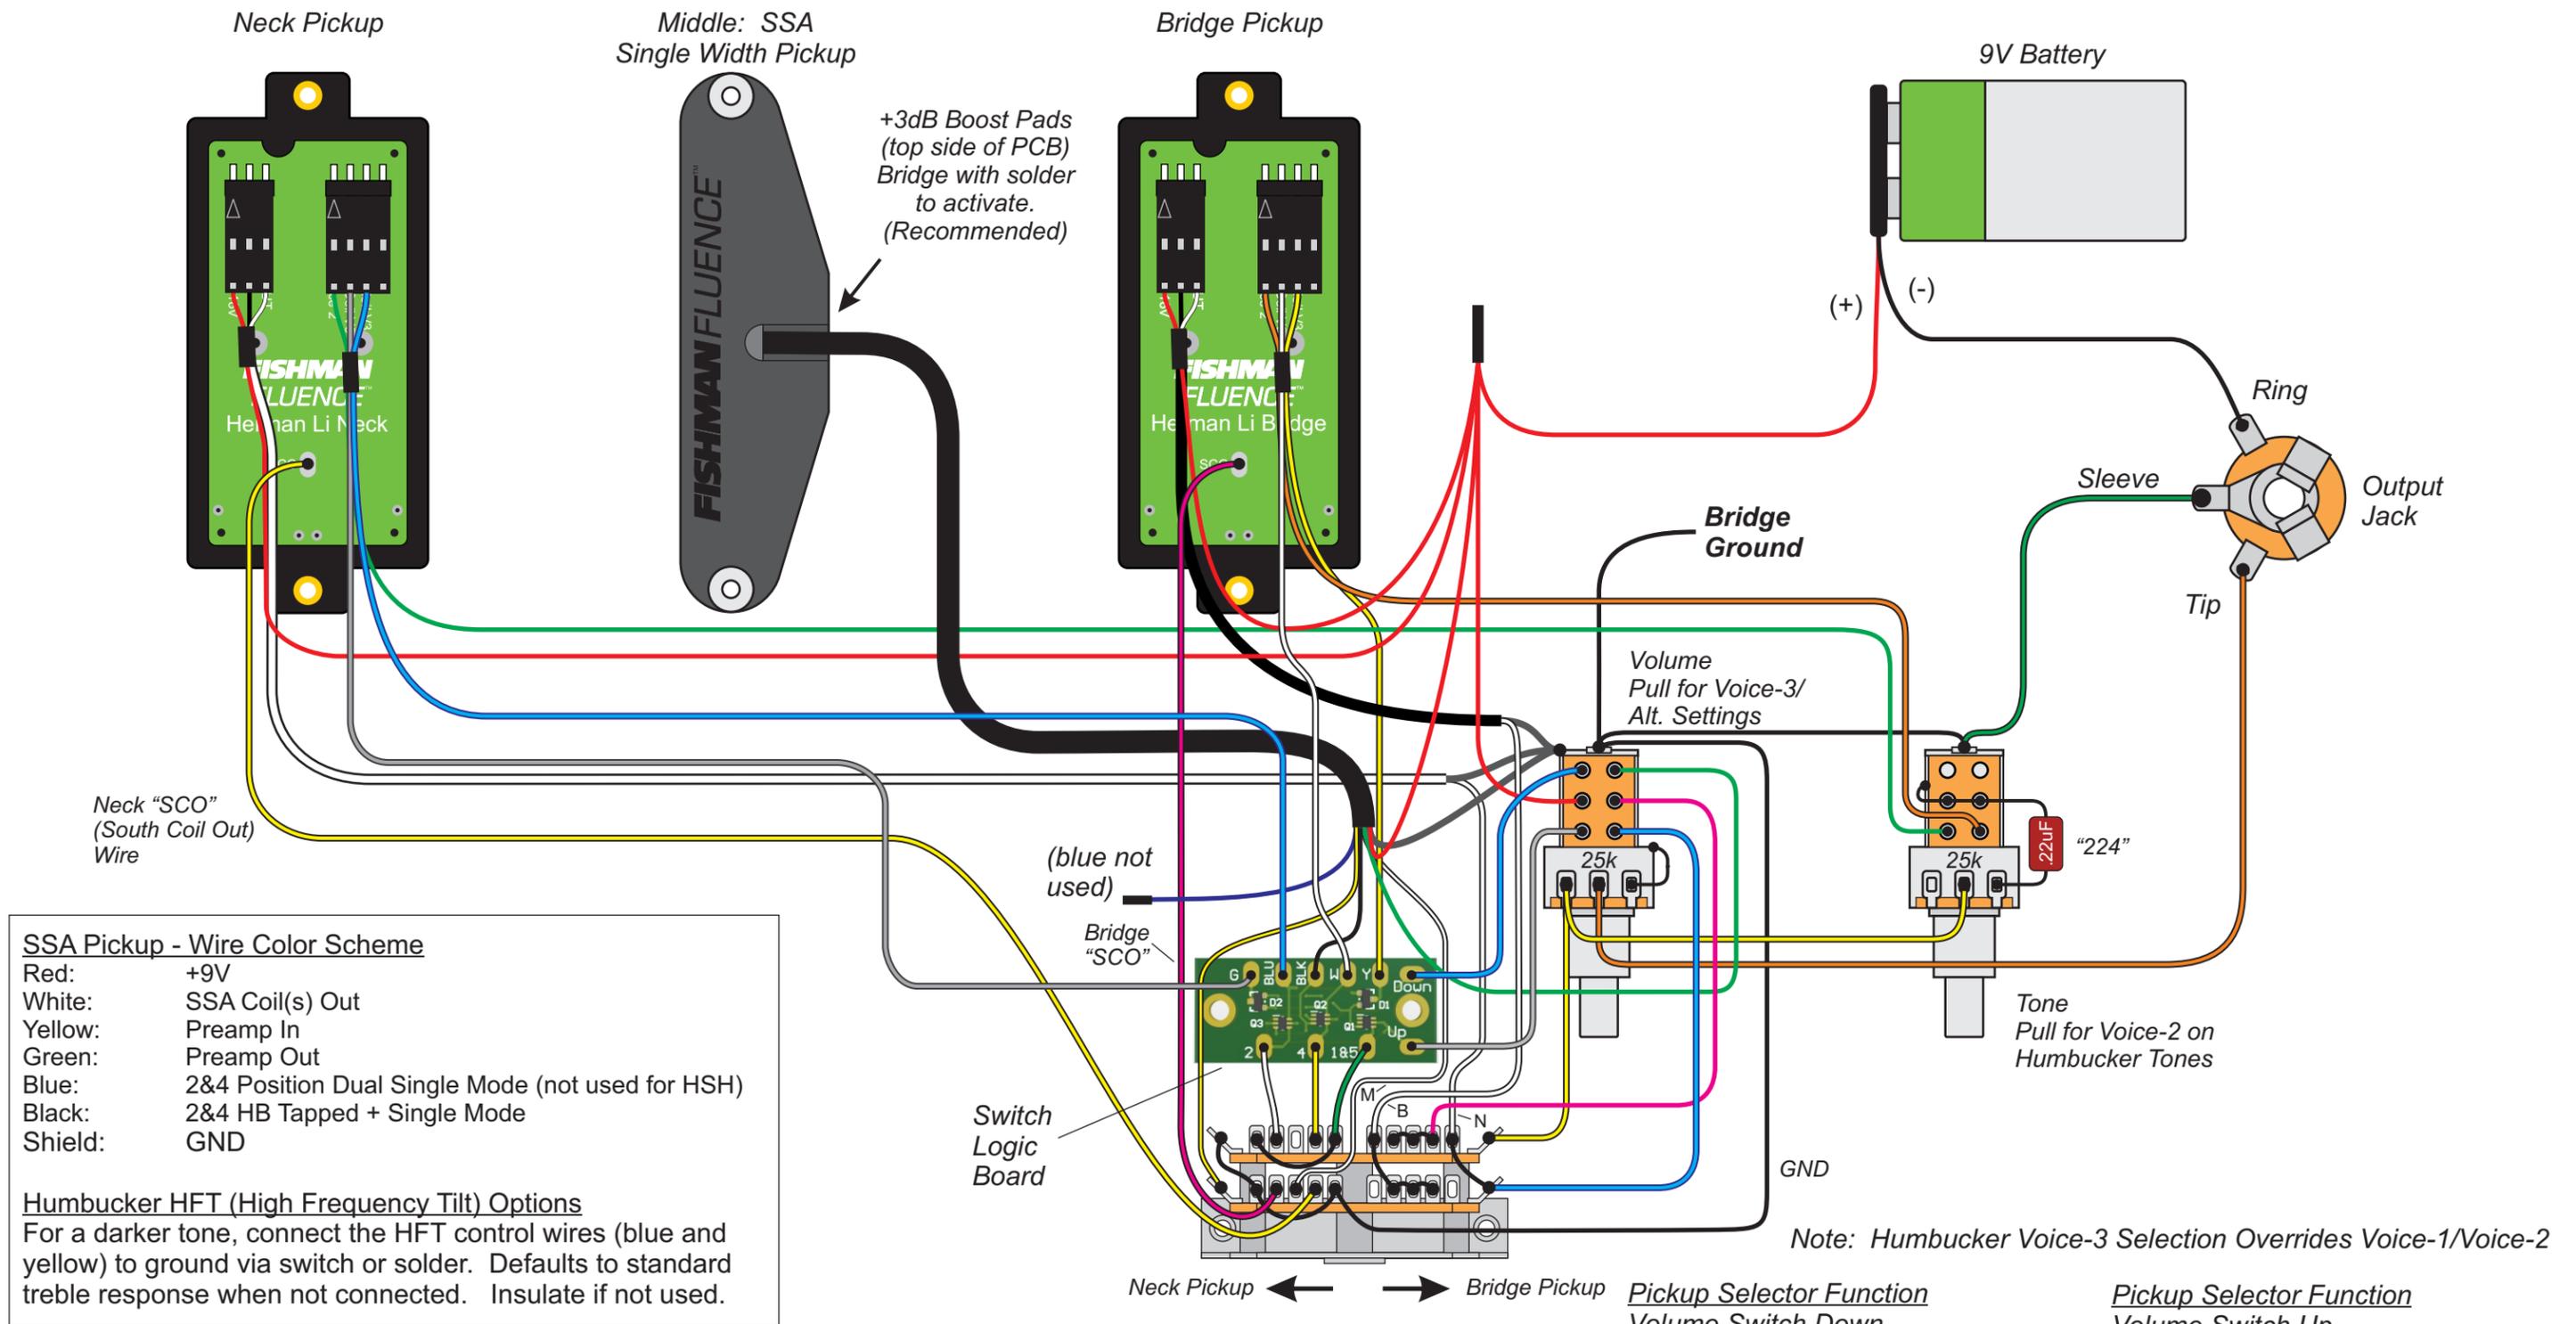

SSA Pickup - Wire Color Scheme

Red: +9V
 White: SSA Coil(s) Out
 Yellow: Preamp In
 Green: Preamp Out
 Blue: 2&4 Position Dual Single Mode (not used for HSH)
 Black: 2&4 HB Tapped + Single Mode
 Shield: GND

Humbucker HFT (High Frequency Tilt) Options
 For a darker tone, connect the HFT control wires (blue and yellow) to ground via switch or solder. Defaults to standard treble response when not connected. Insulate if not used.

- Pickup Selector 5-Position 4P5T "Super Switch"**
- | | |
|---|---|
| <p><u>Pickup Selector Function</u>
 Volume Switch Down</p> <ol style="list-style-type: none"> 1. Bridge Humbucker (V1/V2) 2. Bridge Coil Tapped & Middle 3. Middle 4. Neck Coil Tapped & Middle 5. Neck Humbucker (V1/V2) | <p><u>Pickup Selector Function</u>
 Volume Switch Up</p> <ol style="list-style-type: none"> 1. Bridge Voice-3 Inner Coil 2. Bridge & Neck Voice-3 Inner Coils 3. Bridge & Neck Humbucker (V1/V2) 4. Bridge & Neck Voice-3 Outer Coils 5. Neck Voice-3 Outer Coil |
|---|---|